




selectorized CALF



specifications	GZFM6007
<p>effective resistance: 1 leg - 200 lbs. (91 kg) 2 legs - 400 lbs. (182 kg)</p> <p>configuration: 10 - 100 x 10 lbs. (4.5 - 45.5 x 4.5 kg) 120 - 400 x 20 lbs. (54.5 - 182 x 9 kg)</p>	<p>US / METRIC L - 80" / 203 cm W - 42" / 107 cm H - 73" / 185 cm</p> <p>760 lbs. / 346 kg</p> <p>cable diameter: 3/16-inch rated to 2,000 lbs.</p>

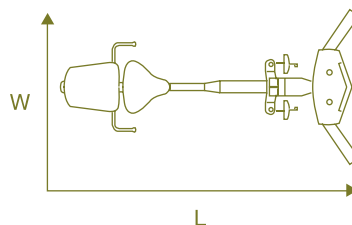

Independently Moving Foot Pedals - Foot pedals move independently, allowing for single or dual foot movements.

Multi-pivoting Pedals - Feet can pivot at the ankle and heel to target specific muscles in the calf, ankle and foot.

Seat Adjustment - Users simply tilt the seat and slide to the appropriate position for an infinite number of settings along the 16-inch rail.

Weight Stack - Enclosed weight stack limits access to moving parts for user safety.

Industrial Construction - Equipment is built with 11- and 7-gauge steel and is electrostatically powder-coated.

Kick Plates - 16-gauge, stainless steel kick plates protect the machine from wear and tear.