




selectorized SQUAT



specifications	GZFM6010
<p>effective resistance: 1 leg - 400 lbs. (182 kg) 2 legs - 400 lbs. (182 kg)</p> <p>configuration: 10 - 100 x 10 lbs. (4.5 - 45.5 x 4.5 kg) 120 - 400 x 20 lbs. (54.5 - 182 x 9 kg)</p>	<p>US / METRIC L - 94" / 240 cm W - 42" / 107 cm H - 73" / 185 cm</p> <p>850 lbs. / 387 kg</p> <p>cable diameter: 3/16-inch rated to 2,000 lbs.</p>

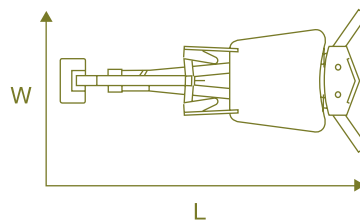

<p>Contoured Platform - Unique platform design enables users to maintain correct ankle alignment and is textured to ensure stable foot placement.</p> <p>Shoulder Pads - Contoured shoulder pads swivel and slide to comfortably fit a wide variety of users.</p> <p>Weight Carriage - Backrest design helps users to maintain proper form and is counterbalanced for easy positioning.</p> <p>Handbrake Release - Hand release disengages the weight stack for safe, easy entry and exit of the machine.</p>	<p>Weight Engagement - Weight carriage ratchets down and engages the weight stack when the user begins exercise.</p> <p>Weight Stack - Enclosed weight stack limits access to moving parts for user safety.</p> <p>Industrial Construction - Equipment is built with 11- and 7-gauge steel and is electrostatically powder-coated.</p> <p>Kick Plates - 16-gauge, stainless steel kick plates protect the machine from wear and tear.</p>
---	---